

12

EUROPEAN PATENT APPLICATION

21 Application number: 83304995.0

51 Int. Cl.³: **H 04 N 7/10**

22 Date of filing: 30.08.83

30 Priority: 07.09.82 GB 8225479
29.09.82 GB 8227845

71 Applicant: **THORN EMI PLC**, Thorn House Upper Saint Martin's Lane, London, WC2H 9ED (GB)

43 Date of publication of application: 21.03.84
Bulletin 84/12


72 Inventor: **Barnes, Barnard Thomas Peter**, 23 Medina Way Upper Stratton, Swindon Wiltshire, SW2 6NW (GB)
Inventor: **Topping, Douglas Randall Peter**, Bentley Middle Street Nazeing, Waltham Abbey Essex EN9 2LB (GB)

84 Designated Contracting States: AT BE CH DE FR GB IT LI LU NL SE

74 Representative: **Fleming, Ian Alexander et al**, THORN EMI Patents Limited The Quadrangle Westmount Centre Uxbridge Road, Hayes Middlesex, UB4 0HB (GB)

54 **Television and distribution network.**

57 A cable television distribution network has a central store and control unit 1 connected to a number of main transmission lines 2 from which are tapped spurs 3 linked to domestic television receivers (of which only one, 4, is shown). In operation, the central unit 1 sends command signals in teletext format down the main transmission lines 2 to operate on either the receiver 4 or a remote device (via the receiver 4) e.g. keyboard 5, heating system 6 or security system 7; also the unit 1 can process any signals returning from receiver 4 (including any originating from the remote devices) and take appropriate action.

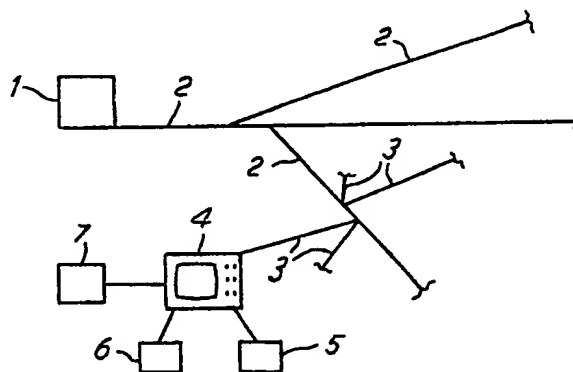

BEST AVAILABLE COPY

EP 0 103 438 A1

: 1 :

CABLE TELEVISION

The present invention relates to a cable television distribution network, and to a television receiver for use in such a network.

The present invention provides a cable television
5 distribution network characterised by means to send command signals in teletext format along a transmission line to a television receiver whereby, in use, said command signals initiate automatic operation of selectively the receiver or a remote device in accordance with said command signals.

10 The present invention also provides a television receiver characterised by means to identify command signals in teletext format which, in use, are sent along a transmission line to the receiver, means to filter out the command signals and any associated data signals and means to initiate automatic
15 operation selectively of the receiver or of a remote device in accordance with the command signals.

The present invention provides a cable television distribution network characterised by means to send command signals in teletext format along a transmission line to a
20 television receiver whereby, in use, said receiver effects an operation or operations in accordance with said command signals and sends a signal in accordance with said command signals along the transmission line towards the source of the command signals.

The present invention also provides a television receiver
25 characterised by means to identify command signals in teletext format which, in use are sent along a transmission line to the receiver, means to filter out the command signals and any associated data signals, means to make an operation or

operations in accordance with the command signals and means to send a signal, in accordance with said command signals, along the transmission line towards the source of the command signals.

Preferably, the signal sent by the television receiver
5 towards the source of the command signals is also in teletext format.

By "teletext format", there is meant any format which provides for the transmission of signals to a television receiver during the frame blanking intervals. Thus preferably
10 such signals can be processed by conventional broadcast teletext modems, for example those used in the British systems "Ceefax" and "Oracle", in the French system called "Antiope", in the Canadian system called "Teledon", or in the Japanese system called "Captain". Thus a cable system embodying the present
15 invention can utilize existing processing equipment, and also processing equipment which is suited for alternative, more widespread use. Thus, for each of these reasons, such a network and appropriate television receiver is cost-effective.

Also the present invention provides a cable television
20 distribution network characterised by means to send command signals along a transmission line to at least one television receiver, the command signals being in teletext format and being addressed to the at least one receiver, whereby, in use, the command signals initiate automatic operation of selectively the
25 at least one receiver or a remote device in accordance with said command signals.

Moreover, the present invention also provides a television receiver characterised by means to identify command signals in teletext format which, in use, are addressed to the receiver and
30 sent along a transmission line to the receiver, means to filter out the command signals and any associated data signals and means to initiate automatic operation selectively of the receiver or of a remote device in accordance with the command signals.

35 Thus the network may have the feature of selective addressability, whereby a central control unit can send a

command signal or command signals to any one or more receivers in the network as requested.

The command signals are not for actual display on the receiver but for effecting operation on the receiver or another
5 apparatus via the receiver. One such operation can be the display of an image on the screen, the data for the image being transmitted subsequent to the relevant command signal.

The command signals may prepare the receiver for sending a return signal along the transmission lines towards the source of
10 the command signals. Also the command signals may instruct the receiver to reply in a specified form. There may be a micro-computer at or adjacent the source of the command signals to effect control of the transmission of the command signals and the reception of the return signals.

15 The command signal may be effective to operate the receiver or to alter its output or to operate apparatus remote from that (but effected via) the receiver, or any combination of these possibilities.

The command signal may be a single line in teletext format
20 which precedes each field of line signals in a television programme for display, so that only receivers capable of processing the command signals are able to correctly display that programme.

Preferably the means to identify the command signals, in
25 use, examines a particular section of data in the teletext format and recognises data indicating that the command signal is not a standard broadcast teletext signal.

Preferably a command signal includes information on how it and/or the succeeding data signal can be de-crypted to a form
30 suitable for display or for operation on the receiver or a remote apparatus; the encryption may be in the form of random inversion (or some other modification) of the video signal, or of random chopping of the audio signal or of encryption by bit-inversion of a normal teletext signal, or variation of the
35 d.c. level of the audio signal, or any combination of such possibilities whether synchronised or not.

In one form the command signals can superimpose an insert display on the screen during a broadcast or line-transmitted programme, thereby enabling easy updating of information.

In one form, command signals can effect activation of the
5 television receiver.

The present invention also provides an add-on unit for a conventional television receiver (whether with no teletext facilities at all or only with conventional broadcast teletext facilities) to modify it so as to embody any of the features
10 described elsewhere in this specification.

Another aspect of the present invention provides a television distribution network characterised by:

a first part in which television display signals and/or command signals are broadcast by e.g. satellite to a
15 distribution centre; and a second part, including a cable television distribution network as described above, in which television display signals and/or command signals are sent from the distribution centre along a transmission line to a television receiver.

20 The distribution network need not be solely a cable distribution network in which display signals and/or command signals are sent along transmission lines; additionally or alternatively the network may be a broadcast (optionally via satellite) network. Advantageously the display signals and/or
25 command signals are initially broadcast (preferably via a satellite) to a distribution centre, and then they are sent along transmission lines to the television receiver.

The present invention also includes a television receiver suitable for operation in a network according to this aspect of
30 the invention.

In one form of this aspect of the invention, the broadcast network incorporates a time division multiplex system and the encryption means comprises means to effect a change in the processing of the signals for broadcast. Once received by the
35 television receiver, the broadcast signals can be decrypted in a manner substantially corresponding to that described elsewhere in this specification.

Preferably the time division multiplex system corresponds to that proposed by the Independent Broadcasting Authority and known by the title "Multiplexed Analogue Component" system.

The present invention is applicable to any suitable
5 topological arrangement of signal source, transmission line and receivers. Thus for example the cable network may be of the "Tree and Branch" type in which all the channels are fed into a main trunk line from which there extend a number of branches serving each subscriber individually. Alternatively the network
10 may be of the "Star System" type (otherwise known as the "Switched System"), in which trunk lines carry all the channels to switching points which route selected services to individual subscribers. In a modification the network may be arranged to be a combination of the "Tree and Branch" and the "Star System"
15 types.

A network embodying the present invention may utilize any suitable form of transmission line for example an electrically conductive line of co-axial or other metal-wired cable or a light-transmitting line incorporating optical fibre(s), or a
20 suitable combination of each.

In order that the invention may more clearly be understood a description is now given by way of example only, reference being made to the accompanying drawings in which:-

Figure 1 shows part of a domestic subscriber cable network;

25 Figure 2 shows schematically the byte distribution in a standard broadcast teletext signal;

Figure 3 shows schematically the byte distribution in part of a command signal used in the present invention; and

Figure 4 shows the format of signals used in another
30 network of the present invention;

Figures 5a, 5b and 5c shows the hamming code bytes, the tests for even parity and the decoding action respectively;

Figure 6 shows the routing appropriate to Figures 5a, b and
c;

35 Figure 7 shows the allocation of function addresses in store;

Figure 8 shows the bit allocation in a command signal;

Figure 9 shows the control signal byte allocation;

Figure 10 shows a method of polling and cuing time displacement of channels and return path frequencies; and

5 Figure 11 shows global Poll routing and timing system.

The cable network has a central store and control unit 1 connected to a number of main transmission lines 2 from which are tapped spurs 3 linked to domestic television receivers (of which only one, 4, is shown). In operation, the central unit 1
10 sends command signals in teletext format down the main transmission lines 2 to operate on either the receiver 4 or a remote device (via the receiver 4) e.g. keyboard 5, heating system 6 or security system 7; also the unit 1 can process any signals returning from receiver 4 (including any originating
15 from the remote devices) and take appropriate action.

Television receiver 4 has a decoder which can process both the standard broadcast teletext signals and also the command signals from unit 1. This decoder may, for example, incorporate a conventional Teletext processor, in which case the equipment
20 for the cable network is cost effective by using a processor for which there is an existing large market. If the decoder incorporates a processor which is a development, or an advance, of the conventional Teletext processor, then the equipment for the cable network is again cost-effective by using a processor
25 for which there is also the potential of another large market. Moreover as many of the subscribers to the cable network will desire the Teletext facility anyway, it is advantageous to avoid duplicating unnecessarily processing equipment.

All the channels of programmes sent along the main
30 transmission lines 2 by unit 1 are synchronised but with the field sync period of adjacent channels being staggered in time.

One form of command signal instructs the decoder to process the next signal which arrives in a specified way and then to display that signal on the screen. Thus if every field scan of
35 a television programme is preceded by such a command signal, receivers without the appropriate decoder are prevented from properly displaying the programme.

Another form of command signal prepares the decoder to activate a transmitter in the receiver 4 in order to send a reply signal back to unit 1. This reply may relate, for example, to a reading of a meter (e.g. electricity, gas or water), to the opinion of the viewer of a programme presently being shown or to the ordering of goods from shops.

Another form of command signal instructs the decoder to activate apparatus remote from the television receiver, for example the heating system 6 or a security system 7 or to report the current status of such apparatus.

A normal page header line of teletext has a first section of 13 bytes of identification information and then 32 bytes of message text as shown schematically in Figure 2. Each command signal has an equivalent first section but in this case the "Sub page code" bytes remain constant using a unique code which is never given in a normal broadcast teletext line; in this way the decoder can readily distinguish between a broadcast teletext signal and a command signal from unit 1 by examining the "Sub page code" bytes. Also bytes 4 to 7 of each command signal have values corresponding to "Page 100, Page header" because the decoder automatically selects the line with this value for initial display.

As shown in Figure 3, the second section of each command signal has information bytes identifying the charge code and the subscriber and instructing the decoder on what action to take. More specifically, the first byte indicates the charge code level of the signal so that, unless the decoder has a charge value equal to or above that of the signal (i.e. the subscriber has paid for the services of the channel for which this signal is a part), the decoder does not receive the instructions contained in the command signal to decrypt the video signals. The charge code level which is an Electrically Alterable Read Only Memory (EAROM) component within the decoder can be changed by suitable down-line programming from unit 1.

The next byte in the signal indicates the code for the specific network so that a decoder programmed for use in one

network cannot be used in a different network, unless of course there is an authorised change of the hard-wired or ROM component responsible for the network code in the decoder.

Bytes 3 and 4 indicates whether the following field scan
5 (where appropriate) is in its normal form or whether it is in inverted form and therefore needs processing before display. Unit 1 produces a random encrypted sequence of inversion of the field scan so that a television programme transmitted along lines 2 cannot be satisfactorily displayed without decoding the
10 field correction byte. Each byte contains a predetermined number (usually 4) of information bits, such that the majority state of the individual bits determines the state of the byte, "0" representing a normal field and "1" an inverted field. There can also be optional encryption of the sound signal
15 associated with the video field scan by chopping in synchronisation with the video field scan inversion or by changing the DC level during inversion or both.

Bytes 5 to 9 represent a code for the particular subscriber of television receiver 4 and would be used when the command
20 signal was to be sent to that particular subscriber. A "0" in all the bits of these bytes would address all subscribers, but any number other than zero would only address that particular subscriber. Uses for this feature include: down-line programming of charge code levels, polling which subscribers are
25 watching a particular programme (enabling assessment of the numbers and identities of viewers) or reading a meter.

Unit 1 uses bytes 10 to 14 to ask the decoder a specific detailed question such that the reply signal which is returned to the unit 1 can be in the form "yes" or "no", indicated by the
30 existence, or not, of a single pulse. Such questions may ask whether the button of keyboard 5 (see Figure 1) is presently depressed, whether the first (and then second etc.) binary digit of the gas meter reading is "1" at present, whether the decoder has received the command signal or whether the subscriber code
35 is a given number.

In an alternative method of reading a meter, a frequency of reply pulse is assigned to each digit from 0 to 9 (i.e. f_0 correspond to 0, f_1 to 1 etc) and then a composite reply signal of the relevant frequency is sent back to unit 1; thus, for a
5 meter reading of 349, a composite reply signal formed by a pulse of frequency f_3 , then f_4 , then f_9 would be sent to unit 1.

Unit 1 uses bytes 15 and 16 to specify what frequency or frequencies the reply pulse or pulses should have. The reply pulses are generated by an IC in the receiver 4 and controlled
10 by the decoder, the IC using the 6M Hz oscillator in the teletext decoder as the reference source to provide a 5.86 KHz spacing in each of 60 possible frequencies over the range 8.0 to 10.2 MHz. The output level of a pulse is about + 51 dB mV RMS with a duration of 4 line periods, the pulse space being at
15 least 4 line periods to allow for signal decay. A raised cosine pulse is used to minimise interaction with adjacent channels; frequency spacing and modulation are chosen so that a zero occurs in the spectrum at the adjacent carriers to give a minimum in cross-talk.

20 The time staggering of the channels helps to distinguish the sources of all the reply signals. Thus the unit is able to determine that any pulse received at a given time and of a given frequency must be a positive reply to a particular question, the absence of such a signal at that time indicating a negative
25 reply to that question.

Bytes 17 and 18 contain information for down-line programming the charge code to a specific receiver.

Byte 19 includes information suitable to over-ride the Data Entry Window (DEW) which normally locks out picture information
30 during broadcast transmissions, thereby allowing full field teletext transmission generated by unit 1. With the facilities described above, such teletext programmes could involve interactive learning.

There remains an additional 13 bytes in the second part of
35 the command signal for which additional functions can be assigned. For example the command signals can incorporate

further codes which act as security measures to ensure highly confidential information is only received at specific television receivers.

Each of the bytes include single Hamming protection.

5 The receiver 4 may include an information store, so that unit 1 can command the decoder to hold information (e.g. a meter reading) in the store for subsequent retrieval and relay to unit 1 upon a further command signal at a later time. This facility may also be particularly useful when ordering goods seen in
10 television advertisements or in teletext 'pages'. The receiver may include an indicator to show when the order has been relayed to unit 1.

Unit 1 may provide a 'local' version of the teletext information magazine as a complement or an alternative to the
15 nationally broadcast teletext magazine. The locally generated teletext pages from unit 1 are synchronised from a master generator but with the field sync pulses phase-shifted to allow the reply signals to be time-multiplexed. A microcomputer at unit 1 controls the interleaving of the command signals and
20 reply signals.

Figures 4 to 11 illustrate aspects of another cable network embodying the present invention.

The network uses teletext coded signals to carry command information from the cable control unit (hereafter known as
25 "Control") to each subscriber. The return channel from the subscriber is generated in a cable system adaptor of the television receiver and occupies a band between 6 and 10 MHz. The signal returned along this channel can be a single burst or can be PSK modulation.

30 A valid command signal is indicated on the page header (packet X0) by a page sub code in bytes 8 to 11 (see Figure 4), with coding that is nationally agreed (i.e. not to be used for other purposes in off air broadcasting). Bytes 1 to 7, 12 and 13 and control bits C4, C5 and C6 are used for the same purposes
35 as a broadcast or Local teletext packet X0. The remaining 32 bytes of packet X0 carry command signal information protected by

single bit hamming protection (see Figures 5 and 6), thereby giving 128 message bits arranged as two command signals each of 64 bits. The two Insertion Test Signals (ITS) lines are used for the broadcast channels being distributed. After using one ITS line for a command signal, a locally re-inserted standard packet X0 is needed in the next line in order to return the cable receiver to broadcast mode; this makes the network transparent to broadcast teletext for all normal receivers. Thus, the network has two command signals per field for broadcast channels.

For locally generated channels, where all 16 teletext lines are available if required, one magazine would be used exclusively for command signals. In this case a page header gives the escape into the "command signal mode" followed by normal rows of the same magazine for further command signal lines. It is then not necessary to use another header to return to the original magazine. Up to 32 command signals per field would be possible for locally generated channels. The number of command signals per field would be possible for locally generated channels. The number of command signals per field would decrease in accordance with the number of lines used for local teletext.

Each command signal contains two groups of data, the first group includes a subscriber number associated with an individual adaptor and may be to a national standard to allow interlinking of separate networks, or the national standard address format could be transposed to decimal format by the central control unit if necessary. The second data group includes information and instructions to a computer controlling the various functions in the adaptor. Table 1 shows the allocation of function addresses in a non-volatile RAM memory, organised in 256x8 bit words and able to cater for different functions; this provides a flexible arrangement allowing for future expansion of facilities operable by the network.

0103438

: 12 :

TABLE 1

<u>FUNCTION ADDRESS</u>	<u>FUNCTION (BYTE)</u>	<u>FUNCTION ADDRESS</u>	<u>FUNCTION (BYTE)</u>
0.	USER(IDENTITY)		
1	<u>NUMBER</u>	ETC	METER READINGS
2	NETWORK		(ELECTRICITY)
3	<u>NUMBER</u>		"
ETC	P.I.N. <u>NUMBER</u>		
	<u>TRANSACTION NUMBER</u>		METER READINGS (GAS)
	<u>SCRAMBLE LEVEL</u>		"
	<u>PAY PER VIEW</u>		<u>TV/VCR ON-OFF</u>
	<u>CHANNEL TUNED TO</u>		NETWORK
	<u>ALARM STATUS</u>		<u>NUMBER (CHECK)</u>
	<u>IFC REQUEST</u>		SHOPPING MESSAGES
	FIRE ALARMS		"
"	"		"
	" "		MAG. NUMBER
			<u>PAGE NUMBER</u>
	SECURITY ALARMS		
	" "		<u>ENCRYPT KEY WORD</u>
	" "		
	<u>AUDIENCE RESPONSE</u>		<u>GO TO PAGE STORE</u>
			ETC.

The function address is defined by 9 bits. The first most significant 8 bits giving the 1 of 256 location, the least significant bit defining which nibble is being addressed.

5 An adaptor is alert to all command signals directed through the channel to which it is turned, until it recognises a command signal applicable to that adaptor; it then ignores all subsequent command signals until the necessary action has been completed.

10 The allocation of bits in a command signal is shown on Figures 7 and 8. Every cable subscriber can be uniquely addressed in accordance with a national standard, so that inter-network messages can be carried. A cable network head-end re-addresses messages is required, so that a command signal would only need to identify subscribers in a particular zone of the network. By limiting the address length in this way, more use can be made of the rest of the
15 command signal packet. A maximum subscriberage of 16000 per zone (i.e. per trunk) is adequate.

The Subscriber Identity Numner (SIN) is contained in the first 3.5 data bytes of a command signal, and consists of 14 message and 14 protection bits. Thus, when a command signal is received at an
20 adaptor, a comparison is made between the SIN of the command signal and the SIN held in a perminent memory store (eg. a difmos or a battery-powered store) of the adaptor. The 14 data bits allows for 16000 users. An "0" in all bits would address all subscribers.

Upon installation of an adaptor into the network, the adaptor
25 is commissioned by down-cable programming. The installer would have a number of transaction numbers issued. This 14 bit number would be entered into the adaptor by either a plug-in card or by local programming. The control centre would be contacted to confirm details, the adaptir would then have an internal
30 programming switch thrown and would be down-cable programmed. The transaction number would be replaced by the customer's SIN.

A customer will be allocated to a physical network at installation. During commissioning a network number will be programmed into the cable adaptor and held in the appropriate
35 function address.

After commissioning, the network number of users on a physical network can be read to confirm validity. With the physical network therefore confirmed, only the subscriber identity number is required in a command signal.

- 5 The network number will be checked periodically to identify customers joining the network accidentally or illegally from other networks. This would allow Control to take action to debar any alien receiver.

- 10 The network number is contained in two bytes, allowing for up to 65000 networks nationally, and will be related to the nationally agreed network number.

The read/write instruction enables information to be downloaded to or retrieved from the adaptor; by using 2 bits, an additional dropout immunity is permitted.

- 15 The read/write nibble contains 2 message and 2 protection bits. Of the two message bits, "00" = READ, "11" = WRITE, "01" and "10" = NO ACTION.

The following structure of a command-signal depends on the READ/WRITE command.

- 20 The Function Address bytes contain 9 message and 9 protection bits. The function address allows 8 bits for row addressing and 1 bit is used to identify either of the two 4 bit nibbles of the byte. Each function would have a dedicated row address in RAM. The 8 most significant bits contain the function row address.

- 25 Another bit is used as a nibble pointer, such that "1" = UPPER NIBBLE and "0" = LOWER NIBBLE. The preceding READ command means read the content of the RAM address, while the preceding WRITE command means write into the RAM address the ensuing data.

- 30 The data transfer bytes contain 12 message and 12 protection bits for read or 8 message and 8 protection bits for write, the format of the message bits being dependent on which READ/WRITE instruction is used (see Figure 7).

- 35 Thus, for a READ instruction, the bits identify the frequency (of the lowest of a block of frequencies) to be used for the return signal, and the type of signal i.e. single AM pulse, PSK, etc.

Nine bits are used to control the synthesiser generating up to 512 return frequencies (of which only 400 are required).

Three bits specify the type of reply anticipated, up to 8 variations being provided, initially 3 codes have been allocated, namely: (Code 001) for Single Burst, whereby in response to items such as customer polling, a raised cosine burst of return carrier in the range 6-10 MHz is returned, timed from a point within the field sync period following the polling command and defined by the countdown algorithm; (Code 010) for PSK Response, for sending back data stream information such as network number, or for ordering information such as "Shopping at Home"; and (Code 100) for Sixteen Frequency Data Response, whereby the specified return frequency (N) points to the lowest in a block of 16.

In the "Sixteen Frequency Data Response" reply, the return signal is a burst of whatever frequency is appropriate in accordance with Table 2. This system can be used to code a decimal or hexa-demical number.

TABLE 2

Frequency	N	N + 1	N + 2	N + 3	N + 4	N + 5	N + 6	N + 7
Value	0	1	2	3	4	5	6	7
Frequency	N + 8	N + 9	N + 10	N + 11	N + 12	N + 13	N + 14	N + 15
Value	8	9	A	B	C	D	E	F

For a WRITE instruction, 8 message bits given the data to be written into RAM; 4 message bits are unused. Confirmation of receipt could be by a following addressed "read" instruction.

After the difference in bit allocation in dependance on the instruction received, the remaining bits are of the "read and act" type and apply to all adaptors.

The "Inhibit RPS" bit is set to prevent a return signal being sent when required by the central control, for example in the case where an individual adaptor becomes jammed on in the return signal mode.

There is provision for pay-per-view, whereby a number down loaded into RAM would equate to a sum of money paid or contracted for. This would be decremented by a clock, transmitted by command signals. When at zero, authorisation would cease and an addressed

message would be displayed.

The 5 bits 'scramble category' indicate which of 32 tiering levels is associated with the currently transmitted TV programme. This code is sent out to indicate what level is necessary to watch the programme being sent. In the cable adaptor the programme scrambling level is compared to the subscriber level and the decision is made whether to unscramble or not. If the parameters indicate that the customer's scrambling level allows access to the programme being shown, the scramble field indicator is used in the receiver to unscramble the programme.

The scrambled field indicator provides a method for the transmission of de-scrambling information, whereby data is transmitted during each field and acted upon for the next field (or perhaps next but one, dependant on data processing speed); this is known as the "field by field" method. Another method depends on down loading decoding data into RAM in 8 bit packets to be applied to 8 consecutive fields, starting at a defined future time (e.g. 8 fields on); this is known as the "preprogrammed method".

Field by Field Method required part of the adaptor IFC processing capability to be used during every field. Thus 4 message bits are allocated, to indicate whether the picture and sound of the TV programme is encrypted during the next (or next but one) field. The four bits are all the same (e.g. all "1"s means encrypted field), allowing a majority decision to be taken for additional corruption protection.

The Pre-Programmed Method required adaptors to be addressed during only 1 field in 8 (or more). Thus 8 message bits indicate how picture and sound of the associated TV programme is encrypted during some following group of 8 fields (or 16 fields with a repeat option). The scramble indicator byte is written into RAM as a function, two RAM location being used sequentially. The processor toggles between the two locations (see Figure 9).

The first scramble byte (S1) of a newly scrambled programme indicates start of scrambling 8 fields ahead. It is sent out on field 1 and loaded into RAM location 'n'. Each bit of the

scramble field byte indicates whether the picture and sound of a particular field is scrambled or not. A '0' indicates a normal field and a '1' would indicate that the field is scrambled related to a method previously down loaded.

5 On field 9 the next scramble indicator byte (S2) is sent out by control and loaded into RAM location 'n+1'. The TV transmission is scrambled during fields 9-16 in accordance with the scramble byte (S1), while the adaptor also reads S1 and used it to decode.

10 On field 17 scrambling information is taken from RAM location (n+1) and "information from Control" sends scrambling byte (S3) which is loaded into memory location 'n'. As shown in the lower half of Figure 9 a scramble byte could be used more than once, thus increasing the time between command signals with scramble
15 information.

To give improved drop out immunity if desired the scramble field byte could be sent out more than once during the load phase so that if a Hamming check failed the receiver could reload the information. In this case 3 bits would be used to give a count
20 down to the scrambling datum.

Information of value or confidential pages would be sent out with an unspecified number of bits inverted. The keyword bytes down loaded into the adaptor function table allow these bits to be re-inverted to give a meaningful display. Prior to the adaptor
25 being able to make use of the keyword the customer must have paid for a transaction numbner or be a member of a closed user group and have the appropriate card entered into the cable adaptor. The 'Encrypted Message' bit indicates whether or not a down-loaded message is encrypted.

30 A poll can be sent out to identify customers requesting information value pages that are held in non-immediate store. The resulting spectrum would identify all subscribers wishing pages. Subscribers wishing to use the service will be sent a command signal down loading a transaction number and a return frequency.
35 By PSK signalling the customer would send back just the page number required. The page would be placed in the page store

encrypted related to the subscribers PIN number and the transaction number. The addressed receiver would then be able to unencrypt the information sent.

The spare bits will allow for modification during evolution.

5 Return Path Signalling (RPS) by means of short bursts of carrier frequency, appropriately modulated. The characteristics of the system are:-

a) Frequency spectrum - 6 to 10 MHz.

b) Modulation method:-

10 Either - single bursts of amplitude modulation (AM)
Or - pulse trains of phase shift keyed (PSK) modulation, at a bit rate in the region of 2.4 K bit/second.

c) RPS channel bandwidth - 10 KHz.

d) Number of RPS channels - up to 400

15 An RPS response is always prompted by the control unit by means of a command signal. All RPS frequency or frequency block allocations remain under software control.

For single bit responses, the carrier modulation takes the form of a raised cosine pulse of width 200 uS (amplitude to be
20 defined). Allowing the decay time and propagation delays in a local cable system (e.g. for maximum length of 10 Km), the minimum allowable time between successive responses from any source is of the order of 500 uS.

One method of timing or cueing the return signal uses
25 software-defined frequency blocks and selected time slots to queue RPS responses such that they reach the control unit in an orderly and non-contentious sequence. It is called global polling, and is the method most widely used for single bit response. A valuable feature of this method is that the identity of each individual
30 respondent can be recognised by Control. Details of the procedures are outlined in Figure 10.

Each adaptor in a network gives a one bit response to a particular IFC prompt by means of a burst of carrier at a defined frequency, transmitted within a defined time slot. There are
35 periods of time related to an integral number of TV lines. The clock in the adaptor counts each line sync pulse starting from a

chosen point in a particular field sync pulse. The start point is cued by command signal and one time slot is defined by the time for 8 T.V. lines (8x64 S). This gives (very nearly) 39 time slots per field.

- 5 The response frequency is one selected from a block of 16. Control defines the particular block of 16 to be used at any moment by transmitting a command signal containing the bit number of the lowest frequency in the block.

10 The adaptor identity number is stored in digital format, e.g. 14 bits.

Upon prompt by a command signal, the adaptor enters a sub-routine as follows:-

- a) Read least significant 4 digitals of I.D.
 -this defines 1 of 16 RPS frequencies in the block.
- 15 b) Read remaining 10 digits of I.D.
 -this defines 1 of 1,024 time slots.

An adaptor responds with a burst of its carrier frequency at the time thus defined, by matching its count of time slots with its own remaining 10 digits of I.D.

- 20 For example, when used for a global poll, all adaptors of a 16,000 potential population network are prompted by an "all addresses" command signal to respond to a viewing poll. The response time would be:-

$$\frac{16,000}{16} \times 512 \text{ S} = 512 \text{ ms}$$

25 16

- Thus it takes a minimum of roughly 0.5 seconds to complete all RPS responses whether directed down a single programme channel or simultaneously down all channels. This timing takes no account of the data processing time required either in an adaptor or at
- 30 the control unit. The limitation is assumed to be in the adaptor in terms of trade-off between processor system cost versus speed. For the purpose of illustrating response times of the network, the delay in the adaptor between the prompt and the start of the first RPS response is estimated in terms of the time for an integral
- 35 number of TV fields. A large number is used - viz., 10 field periods (0.2 seconds). This gives a global poll response time at

Control of 0.7 seconds. The responses can be analysed by time and frequency at the control unit to unravel individual adaptor identities.

5 Since many of the programmes carried on the network will be locally generated, their field can be synchronised but phase shifted. Figure 10 shows programmes each time-shifted by 12 lines. This allows single bit responses to be carried upstream using the same frequencies on consecutive programmes.

10 In general, the control unit polls all or section of a network population to identify the adaptors who wish to communicate a particular piece of information. The control unit then individually addresses each respondent for the data. The 30 channel cable system is split as follows:-

- a) 10 off-air channels.
- 15 b) 14 general local Channels.
- c) 6 special local Channels (e.g. Shopping at Home, full-field Teletext).

This split allows account to be taken of the different addressing speeds for each group viz:-

- 20 a) 2 command signals per field (one line)
- b) 16 command signals per field (8 lines)
- c) Up to 32 command signals per field (all 16 available lines)

To do an alarm test by global poll, the control unit sends "all-identities" command signals routed and times as shown in
25 Figure 11 and addressed to the ALARM STATUS function in RAM. A positive response means "all alarm systems fitted are operational". No response could mean "no alarm fitted" or "one or more alarms not operational". Two alternative procedures could be adopted to resolve this; either the Control refers to a look-up
30 table to determine which subscribers logged as having alarms fitted have not responded-in which case only these identities are individually addressed by Control for details, to be returned in data stream mode by reading from the relevant RAM address/es; or all adaptors could have an internal "alarm simulation" (eg link)
35 provided which is removed when the adaptor is actually connected to a customer's alarm system.

In this case, Control prompts all no-response identities individually to send details, as above. Further "no-responses" to individually addressed command signals would be flagged by Control for special attention. (e.g. in the case where alarm simulation
 5 links are provided, repeated "no-responses" might mean the incoming cable has been cut, or mains power to the receiver is off, etc).

Activation of an alarm triggers the following events in an adaptor:-

- 10 a) Alarm details are entered in the appropriate alarm function address in RAM.
 - b) COMMAND SIGNAL REQUEST address in RAM is activated.
 - c) Adaptor is switched to a designated local channel, to wait for a prompt for COMMAND SIGNAL REQUEST.
 - 15 d) The TV screen shows "Alarm raised", by an appropriate means.
- The alarm details are subsequently transmitted to the control unit by the procedures described under "Message Sending", which includes acknowledgement by Control of receipt of message.

For audience measurement by global poll, Control sends
 20 "all-identities" command signals sequentially down each channel, times as shown in Figure 11. Adaptors are commanded to monitor the status of the "TV/VCR on-off" address in RAM, and respond if programme material is being used. Total response time is 24 Response Time Periods (16.8 second,) for routine polls. Repetition
 25 rate would probably be fairly infrequent, say every 10 - 15 minutes, with the addition perhaps of snap polls at need. Channel time occupancy would be very low (eg. 0.7 seconds in 10 minutes).

The procedure for an audience response poll is:-

1. Global poll on the particular channel for choice 1,
- 30 2. Global poll on the particular channel for choice 2,
3. Global poll on the particular channel for choice 3, etc. The response time would be (0.7 x number of choices) seconds.

The feature of "Messages to Control" is only available on locally generated programme channels. The last command signal
 35 space in the 8 designated lines on one field is used to prompt a COMMON SIGNAL REQUEST response, sending to all addresses on all

local channels simultaneously. If an individual receiver is busy at the time, having been addressed by the control unit in any of the prior 15 spaces or in previous fields, then this command signal prompt is ignored. This allows message prompting to be at a fast repetition rate, but an adaptor only responds when its processor is free.

The adaptor replies if the COMMAND SIGNAL REQUEST address status is active (ie. when a message resides in one or more of the allocated addresses).

For the Message Location Phase, the control unit analyses the global poll responses and queues them in an orderly identity-bases fashion. It then addresses each respondent in batches of 16 per field, down all local channels simultaneously, allocating a response frequency (it has to remember the identity/frequency relation for future reference). The routine global poll version of COMMAND SIGNAL REQUEST but the response instruction is to read out the contents of this function address in data stream mode, The first digit of the contents is "address active" (already known by the global poll), but the next 7 define the location in RAM where the message resides.

For the Message Sending Phase, Control again addresses the individual identities, this time directing the adaptor to send the message in data stream mode from the particular RAM location just supplied.

The Message Acknowledgement Phase, further addressing cycle is necessary to indicate "message received by the control unit". This can trigger "wipe message location address clear" and also, for instance, "alarm received" indication on the TV screen.

Response Times are as follows:-

- a) Global Poll = 0.7 seconds (all respondents)
- b) Message Location, for one batch of 16 adaptors
= 0.2 (10 field delay) + approx 0.005 (1 byte) seconds.
- c) Message Sending, for one batch of 16 adaptors
= 0.2 + up to 0.03 (6 bytes, say) seconds.
- d) Message Acknowledgement, for one batch of 16 adaptors
= 0.2 seconds (process delay before TV display). The full

cycle for the first batch of 16 respondents would therefore probably take less than 1.5 seconds, allowing for some processing time at the control unit. Further batches of 16 per field could be processed sequentially during the 10 field delay times of the first batch, perhaps using the same RPS frequencies with careful time management, but more easily using different frequencies.

"Shopping At Home" feature, the Channels used are dedicated to Shopping, which could include full-field Teletext, and are not included in the routine polls applied to other channels. The Shopping procedure starts with a global poll to establish the identities of adaptors with orders waiting COMMAND SIGNAL REQUEST byte, establishing the RAM location of the message (in this case, the shopping list, which may reside in a special page store). A further address cycle extracts the data, followed by an acknowledgement cycle which cues the TV screen to display "order received".

Each shopping list contains the following data sections:-

- a) Personal Identity Number (PIN) - for credit worthiness check, personal authority for order, etc;
- b) Up to 48 list items (2 columns of 24 lines on a text page). Each item is allocated say 5 characters for reference number and 2 characters for quantity = bytes;
- c) The data closes with Cyclic Redundancy Check (CRC) digits. If the CRC check at the control unit reveals a transmission error, the subscriber is moved down the waiting list, to be interrogated again.

Thus up to roughly 340 bytes of shopping data can be transmitted in one order, taking approximately 1.5 second at a data stream of 2.4K bits/second (allowing for start/stop/space bits etc.). Since 16 identities are addressed in one TV field, the control unit would wait for up to 1.7 seconds for all 16 orders to be completed (0.2 seconds processing time at the adaptors).

The total response time would be:- a) Global Poll = 0.7 seconds; b) Location Poll (16) = $0.2 + 0.005$ seconds; c) Shopping Lists (16) = $0.2 + 1.5 = 1.7$ seconds; d) Acknowledgement = 0.2 seconds. Thus the total time to service the first 16 orders would

be in the region of 2.8 seconds. Subsequent batches of 16 would take 2.1 seconds (already global polled).

These could be shortened if the control unit can manage the re-allocation of frequencies to waiting customers as soon as
5 orders are completed.

Two major types of shopping are available differing in their demands on RPS capacity. These are shopping from Teletext pages, which might be expected to produce long lists, but probably fair evenly spaced out in real time, and shopping from video
10 advertisements, which probably produce brief lists, but many customers will wish to order in a short time period.

Thus a poll may be expected to catch a few long orders plus many short orders (when video advertising is being broadcast). This emphasizes the need for the control unit to re-allocate
15 frequencies to waiting customers as soon as possible.

Since item references can be alpha-numeric, customers would either need a full keyboard or other means must be used. A cursor/pointer facility is provided in the adaptor, controlled from the remote control transmitter. After pointing to the item
20 reference number, a button push would transfer the characters to RAM. This method would be directly applicable to Teletext pages. For video advertisements, customers would need to be asked to switch to a Teletext page to order, or the item references could be numeral only, and entered from the remote control keypad.

25 Betting can be treated in the same manner as the "Shopping at Home" facility. However, in order to formalise the "Betting List" it would be convenient if a betting facility was offered via Teletext pages. Each Meeting/Time/Runner could be coded for identification, and a bet item would consist of this code a number
30 of money units, and code characters defining the type of bet.

An interactivity can be provided readily during Out-of-Programme Hours. Since there is no programme signal a TV pattern generator is used to supply the syncs for time slot count-down. This can make all channels synchronous and global
35 polls can be conducted simultaneously down all channels when

desired. Previous off-air channels become local channels in terms of command signal capacity per TV field.

The functions routinely addressed include:-

- Adaptor identify/Channel Location; Alarm Test; Meter Reading;
5 Netowrk Number Check; Command Signal REmquest.

In the Adaptor identify channel ;ocation function, a global poll is carried out, Channel by Channel, to establish which identities are located on which channel. This requires a "SEND IDENTITY" function in RAM, distinct from the Audience Measurement
10 function "TV/VRC ON". The identity/location map is stored by the control unit for future reference.

The alarm test is carried out in ther normal way, simultaneously down all channels.

In the meter reading function, a global poll down all
15 channels simultaneously establishes the identities of adaptors with meter readings waiting to be read (COMMAND SIGNAL REQUEST active-Meter location pointer). Interrogation of individual identities in batches of 16 down each channel in sequence follows, having used the identity/Channel location map.

20 A meter reading is stored in nibbles, each 4 bit nibble being the binary coded decimal equivalent of one decimal number in the meter reading. A reading of 4 bytes, say, can be transmitted in less than 15 milli-seconds but the total response time has to include the adaptor data processing delay. Assuming a batch of 16
25 adaptors completes a meter reading procedure in less than 0.25 seconds, a poll of a total population of 16000 for one meter reading can be completed in under 5 minutes. Interrogation of other meter addresses follows in sequential cycles.

For a network number check, two "all addresses" command
30 signals are sufficient to down-load the network number into a location each adaptor's RAM, for comparison with the network number already stored. A further global poll command signal prompts a response if a difference is detected.

Additional detective work by the control unit can isolate an
35 alien adaptor, and corrective action taken to exclude it from the network.

Many of the network functions are organised to be carried out sequentially, mainly to avoid contention on the return path. As a result, the number of frequencies used can be limited. A suggested set of allocations is outlined in Table 3.

TABLE 3

<u>FUNCTION</u>	<u>F BLOCK</u>	<u>COMMENT</u>
<u>1.1 Alarm Test</u>	F1	
-follow up	individual f	Transitory f re-usable
<u>1.2 Alarm raised</u>		See Messages
<u>2. Audience Measurement</u>	F1	
<u>3. Audience Response</u>	F1	
<u>4. Messages to Control</u>		
-IFC REQUEST	F1	may use F3, F4 etc.
-Message location	F2 (16 x f)	if interleaving
-Message Sending	F2 (16 x f)	
<u>5. Shopping at Home</u>		
-IFC REQUEST	F11	Another F block, and
-Message location	F _n (16 x f)	another (16 x f) block
-Message sending	F _n (16 x f)	to avoid conflict with
		the general local
		Channels. May use
		F _n + 1, F _n + 2, etc.
<u>6. Betting</u>		As Shopping, But may
		need further F blocks,
		depending on total
		traffic.
<u>7. Interactivity at Night, etc</u>		Probably can be
		limited to F1 and F2,
		plus a few f.

The proposed return signed system can use up to 400 individual frequencies, e.g. up to 25 blocks of 16 if necessary. Using F to denote a block of 16 frequencies, and f for individual frequencies, for a global poll, always use F1 with a reserve block

F(R) allocated in case of emergency; on the special Channels, use, for example, F11.

5 Either of the two cable networks described above can be modified such that any return signals transmitted from the television receiver towards a central control unit are command signals in teletext format.

Either of the cable systems described above can be linked with a system in which video signals are broadcast (e.g. by satellite).

CLAIMS

1. A cable television distribution network characterised by means (1) to send command signals in teletext format along a transmission line (2) to a television receiver (4), whereby, in use, said command signals initiate automatic operation of
5 selectively the receiver (4) or a remote device (5,6,7,) in accordance with said command signals.
2. A cable television distribution network characterised by means (1) to send command signals in teletext format along a transmission line (2) to a television receiver (4), whereby in
10 use, said receiver effects an operation or operations in accordance with said command signals and sends a signal in accordance with said command signals along the transmission line towards the source of the command signals.
3. A network according to claim 2, characterised by the signal
15 sent by the television receiver (4) towards the source of the command signals being in teletext format.
4. A cable television distribution network characterised by means (1) to send command signals along a transmission line to at least one television receiver (4), the command signals being
20 in teletext format and being addressed to the at least one receiver, whereby in use the command signals initiate automatic operation of selectively the at least one receiver or a remote device (5,6,7) in accordance with said command signals.
5. A television distribution network characterised by:
25 a first part in which television display signals and/or command signals are broadcast by e.g. satellite to a distribution centre; and a second part, including a cable television distribution network according to any one of

claims 1 to 4 in which television display signals and/or command signals are sent from the distribution centre (1) along a transmission line (2) to a television receiver (4).

5 6. A television receiver for use in a network according to any one of claims 1 to 5.

7. A television receiver characterised by means to identify command signals in teletext format which, in use, are sent along a transmission line (2) to the receiver (4), means to filter out the command signals and any associated data signals, means to
10 make an operation or operations in accordance with the command signals and means to send a signal along the transmission line (2) in accordance with said command signals towards the source of the command signals.

1/9

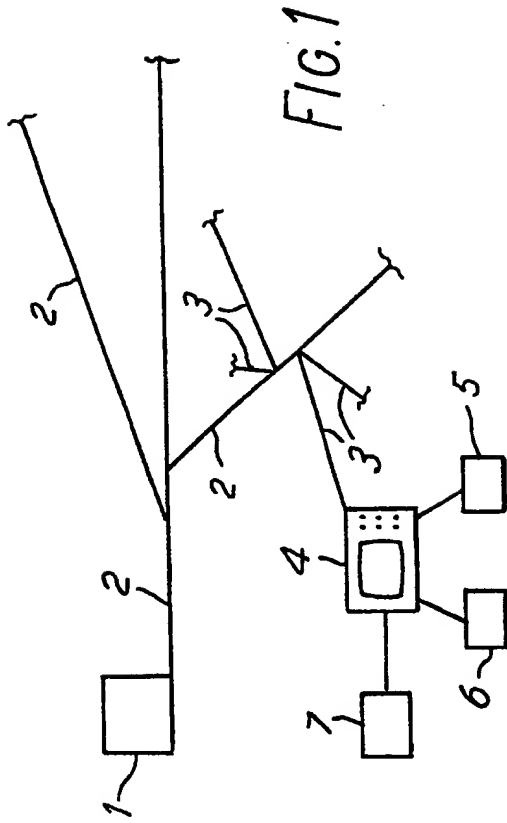


FIG. 1

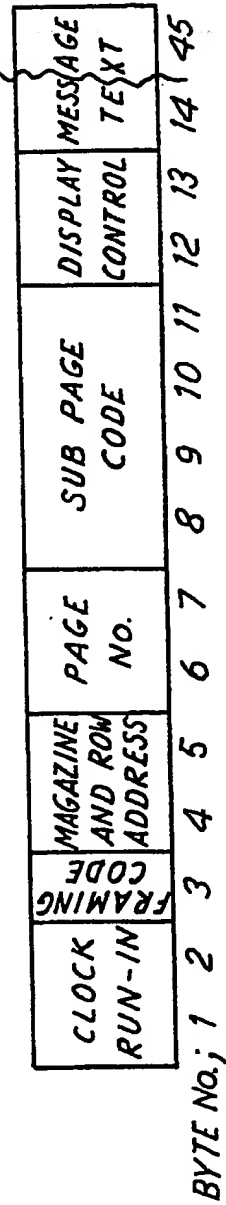


FIG. 2

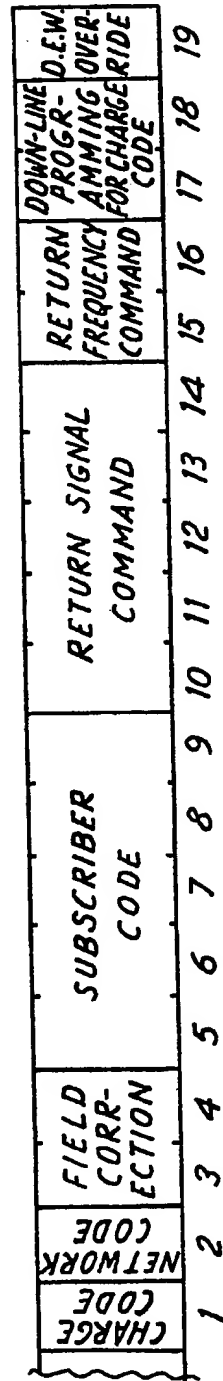


FIG. 3

PACKET X/0	CLOCK RUN-IN	FRAMING CODE	MAGAZINE AND PACKET ADDRESS	PAGE NUMBER UNITS	PAGE NUMBER TENS					CONTROL BITS	CONTROL BITS
	CLOCK RUN-IN	FRAMING CODE	MAGAZINE AND PACKET ADDRESS	40 CHARACTER BYTES ODD PARITY							
PACKET X/1 TO X/23	CLOCK RUN-IN	FRAMING CODE	MAGAZINE AND PACKET ADDRESS	40 CHARACTER BYTES ODD PARITY							
	1010101010101010	11100100	PMPPMPMPMPMPMPMP		P = PROTECTION BITS M = DATA BITS					
	CLOCK RUN-IN	FRAMING CODE	0 1 2 0 1 2 3 4 2 2 2 2 2 2 2 2 MAGAZINE NUMBER	ROW ADDRESS							
	SYNCHRONISATION		HAMMING CODE								

PACKET X/0	PAGE NUMBER	PAGE NUMBER	PAGE SUB- CODE	PAGE SUB- CODE & C4	PAGE SUB- CODE	PAGE SUB- CODE & C5 AND C6	CONTROL BITS C7 - 10	CONTROL BITS C11 - 14	
	PMPPMPMPMPMPMPMP	PMPPMPMPMPMPMPMP	PMPPMPMPMPMPMPMP	PMPPMPMPMPMPMPMP	PMPPMPMPMPMPMPMP	PMPPMPMPMPMPMPMP	PMPPMPMPMPMPMPMP	PMPPMPMPMPMPMPMP	
	8 HAMMING CODES							32 CHARACTER BYTES ODD PARITY	

FIG.4

N.B.
IN IMPLEMENTATION
BIT 8 AND 7 POSITION
MAY BE REVERSED
MAKING BIT 8
PROTECTION AND
BIT 7 MESSAGE

MESSAGE BITS

b_8	b_7	b_6	b_5	b_4	b_3	b_2	b_1
0	0	0	0	0	0	0	0
0	0	0	1	0	1	1	1
0	1	0	1	1	1	0	0
0	1	0	0	1	0	1	1
0	1	1	1	0	0	0	1
0	1	1	0	0	1	1	0
0	0	1	0	1	1	0	1
0	0	1	1	1	0	1	0
1	1	0	0	0	1	0	1
1	1	0	1	0	0	1	0
1	0	0	1	1	0	0	1
1	0	0	0	1	1	1	0
1	0	1	1	0	1	0	0
1	0	1	0	0	0	1	1
1	1	1	0	1	0	0	0
1	1	1	1	1	1	1	1

FIG. 5a

• TESTED BITS

	b_8	b_7	b_6	b_5	b_4	b_3	b_2	b_1
A	•		•				•	•
B	•				•	•	•	
C			•	•	•		•	
D	•	•	•	•	•	•	•	•

FIG. 5b

RESULTS OF PARITY TESTS		INTER- FERENCE	ACTION
A, B, C	D		
ALL CORRECT	CORRECT	NO ERRORS	ACCEPT MESSAGE BITS
ALL CORRECT	NOT CORRECT	ERROR IN B_7	ACCEPT MESSAGE BITS
NOT ALL CORRECT	CORRECT	MULTIPLE ERRORS	REJECT MESSAGE BITS
NOT ALL CORRECT	NOT CORRECT	SINGLE ERROR	REFER TO TABLE 1b TO IDENTIFY ERROR. CORRECT ERROR IF IN MESSAGE BIT

FIG. 5c

4/9

A, B, C AND D ARE THE PARITY CHECKS

<i>D</i>	<i>C</i>	<i>B</i>	<i>A</i>	
0	0	0	0	→ <i>ERROR FREE RECEPTION</i>
0	0	0	1] → <i>REJECT EVEN ORDER ERROR</i>
0	0	1	0	
0	0	1	1	
0	1	0	0	
0	1	0	1	
0	1	1	0	
0	1	1	1	
1	0	0	0	→ <i>COMPLEMENT BIT 7</i>
1	0	0	1	→ <i>COMPLEMENT BIT 1</i>
1	0	1	0	→ <i>COMPLEMENT BIT 3</i>
1	0	1	1	→ <i>COMPLEMENT BIT 8</i>
1	1	0	0	→ <i>COMPLEMENT BIT 5</i>
1	1	0	1	→ <i>COMPLEMENT BIT 6</i>
1	1	1	0	→ <i>COMPLEMENT BIT 4</i>
1	1	1	1	→ <i>COMPLEMENT BIT 2</i>

'0' = PARITY CHECK 'CORRECT'

'1' = PARITY CHECK 'FAILED'

FIG. 6

5/9

0103438

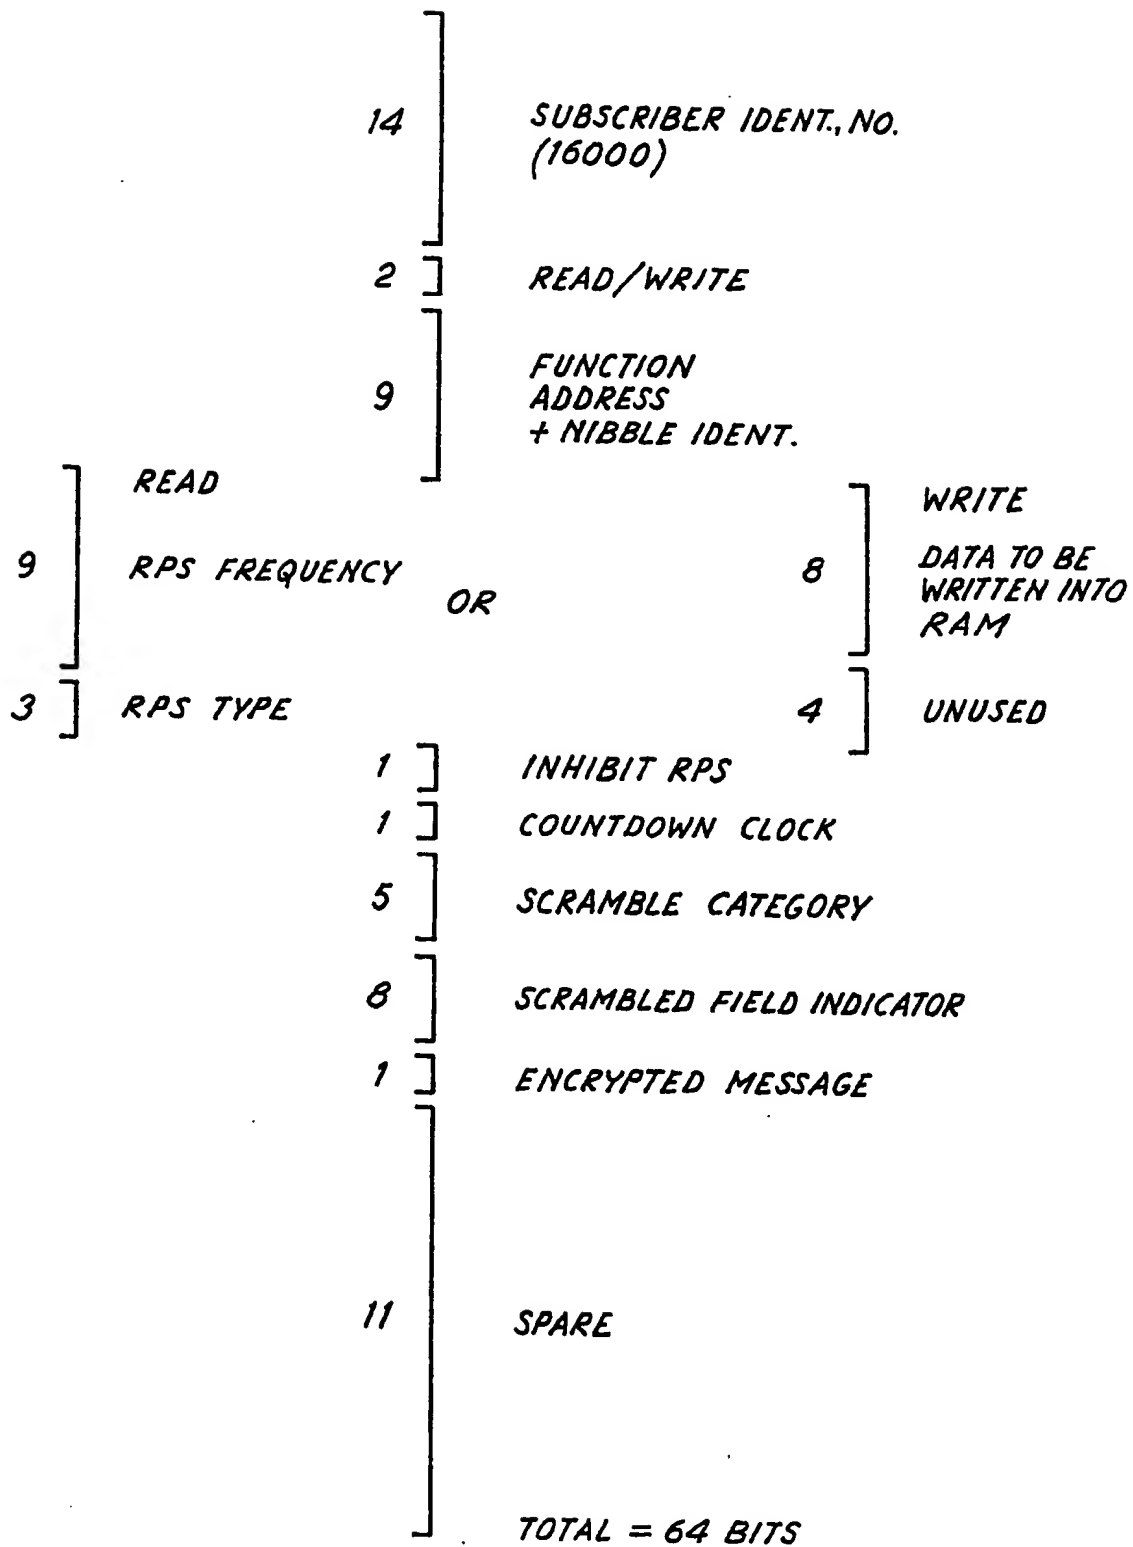


FIG. 7

13*

PACKET NO BYTE
IFC BYTE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32



AD/WRITE

† IF THE SECOND METHOD OF SCRAMBLE INDICATION IS USED (8 FIELDS FORWARD PROCEDURE), THEN 2 BYTES OF IFC ARE NEEDED. "ENCRYPTED MESSAGE" MOVES ONE BYTE TO THE RIGHT, AND "SPARE" REDUCES BY ONE BYTE

5*

PACKETS 1
TO 23 IFC
BYTE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32

* TRANSMITTED BYTE RELATED TO FIRST CLOCK RUN IN BYTE BEING BYTE 0

FIG. 8

7/9

0103438

<i>FIELDS</i>	<i>1</i>	<i>9</i>	<i>17</i>	<i>25</i>	<i>33</i>	<i>41</i>	<i>49</i>
<i>INFORMATION FROM CONTROL</i>	<i>SEND S1</i>	<i>SEND S2</i>	<i>SEND S3</i>	<i>SEND S4</i>			
<i>TV</i>		<i>PLAY S1 (SCRAMBLE RELATED)</i>	<i>PLAY S2 (RELATED)</i>	<i>PLAY S3</i>			
<i>RAM n</i>	<i>LOAD S1</i>	<i>READ S1</i>	<i>LOAD S3</i>	<i>READ S3</i>			
<i>RAM n+1</i>		<i>LOAD S2</i>	<i>READ S2</i>	<i>LOAD S4</i>			
<i>INFORMATION FROM CONTROL</i>	<i>S1</i>		<i>S2</i>		<i>S3</i>		<i>S4</i>
<i>TV</i>		<i>PLAY S1</i>	<i>PLAY S1</i>	<i>PLAY S2</i>	<i>PLAY S2</i>	<i>PLAY S3</i>	<i>PLAY S3</i>
<i>RAM n</i>	<i>LOAD S1</i>	<i>READ S1</i>	<i>READ S1</i>	<i>EMPTY S1</i>	<i>LOAD S3</i>	<i>READ S3</i>	<i>READ S3</i>
<i>RAM n+1</i>			<i>LOAD S2</i>	<i>READ S2</i>	<i>READ S2</i>	<i>EMPTY S2</i>	<i>LOAD S4</i>
<i>TOGGLE TOGGLE TOGGLE</i>							

FIG.9

8/9

0103438

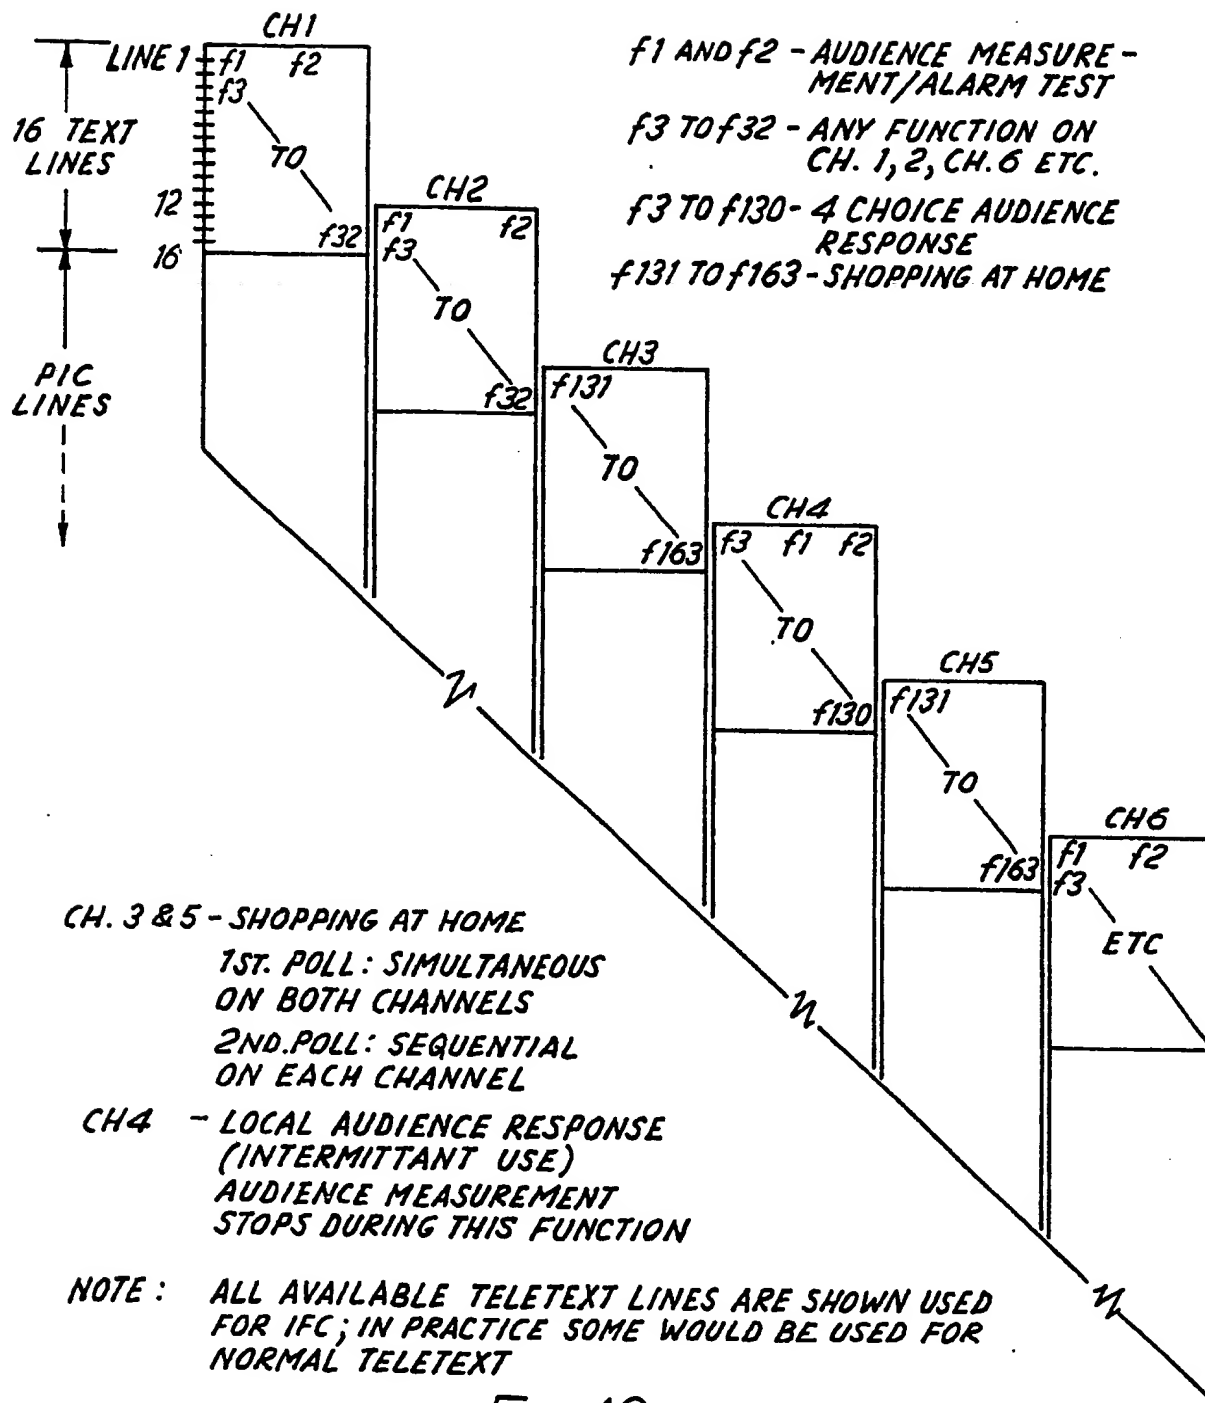


FIG. 10

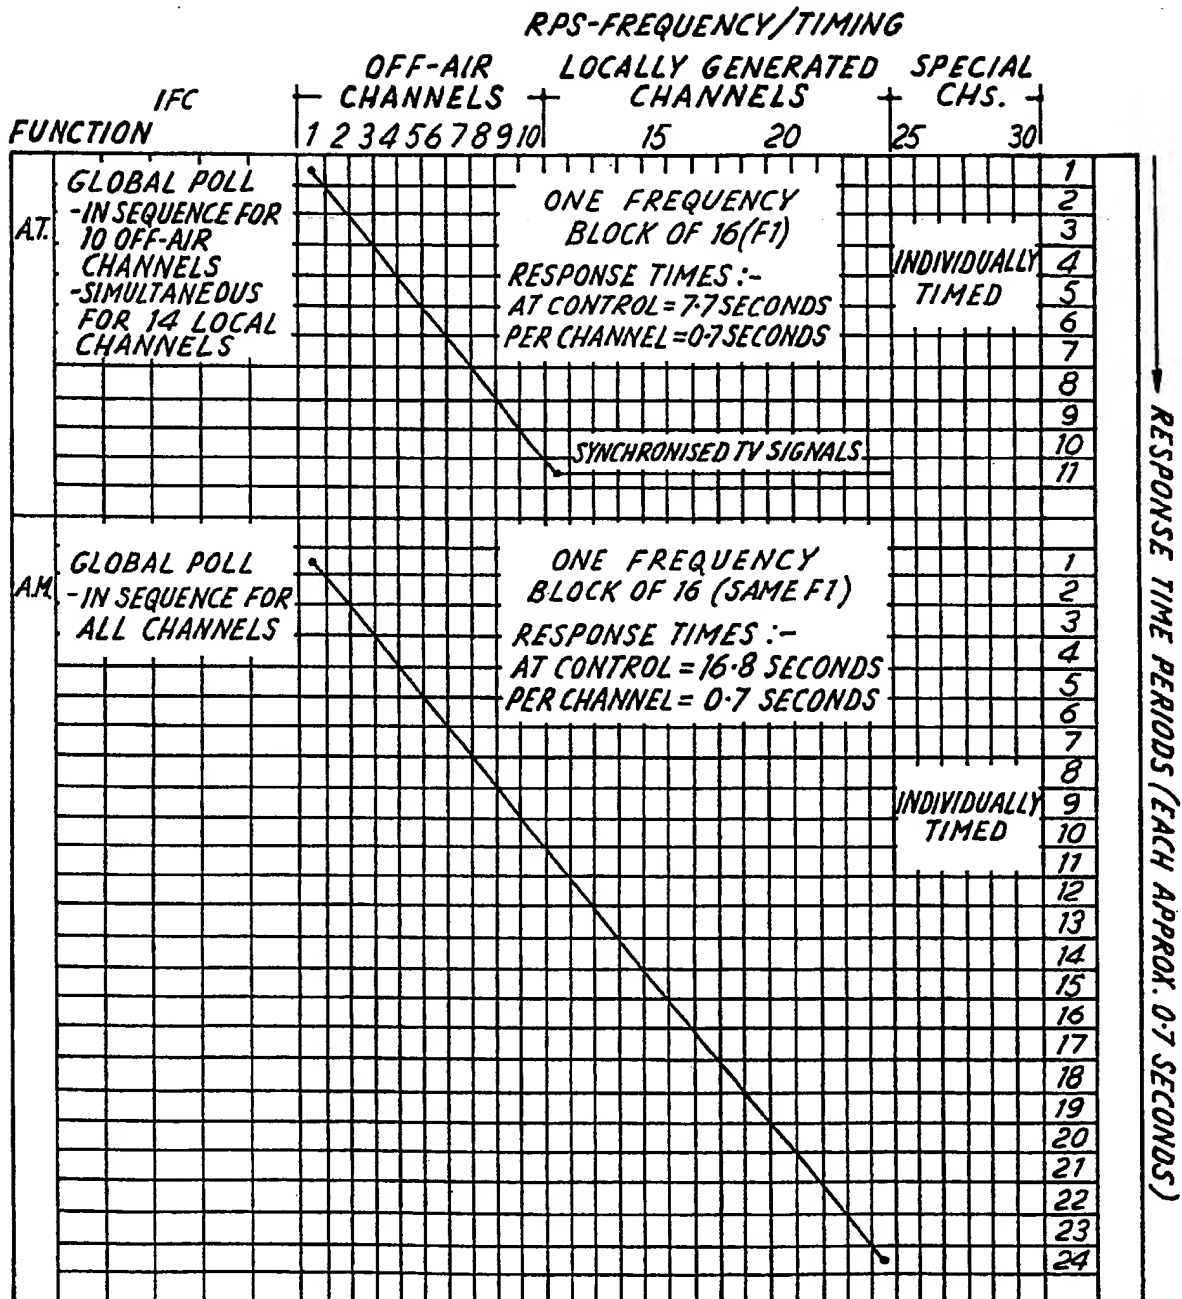


FIG.11





European Patent
Office

EUROPEAN SEARCH REPORT

0103438

Application number

EP 83304995.0

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
X	US - A - 4 090 220 (GARGINI) * Column 1, lines 10-54; fig. 1, column 3, lines 1-46; column 5, lines 10-14 *	1,2,4	H 04 N 7/10
Y	* Column 2, lines 18-27 *	7	
Y	DE - A - 2 260 621 (HUGHES) * Fig. 1; page 11, line 7 - page 15, line 4 *	7	
X	DE - A - 2 141 997 (COMMUNICATIONS) * Page 1, paragraph 1 - page 3, paragraph 3 *	1,2,4	
A	ELEKTRISCHES NACHRICHTENWESEN, vol. 49, no. 3, 1974, Paris, Stuttgart H. HÄBERLE, P.C. ULRICH, W. ZSCHUNKE "Digitale Übertragung von Fernsehsignalen über Satelliten" pages 343-348 * Page 343, fig. 1 *	5	TECHNICAL FIELDS SEARCHED (Int. Cl. 3) H 04 N 7/00 H 04 H 1/00
The present search report has been drawn up for all claims			

Place of search

VIENNA

Date of completion of the search

06-12-1983

Examiner

BENISCHKA

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
 Y : particularly relevant if combined with another document of the same category
 A : technological background
 O : non-written disclosure
 P : intermediate document

T : theory or principle underlying the invention
 E : earlier patent document, but published on, or after the filing date
 D : document cited in the application
 L : document cited for other reasons

A : member of the same patent family, corresponding document

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.